

LPA

La Cañada Unified School District ES Fence Improvements Plan

Site Plan Review

April 17, 2018

guiding principles

The LCUSD Facilities Master Plan will...

Serve the Students First

- Positively affect every student and every site by making our schools 21st Century learning centers.

Enhance Safe and Secure Schools

- Improve student and staff safety while maintaining a welcoming presence to the community.

Inspire and Achieve Tangible Results

- Balance the larger aspirational vision for educating students with the practical and functional needs of each site.

Promote Flexibility

- Create learning environments and spaces able to evolve and grow with change.

Be Financially & Environmentally Responsible

- Invest with purpose and responsibility as good fiscal stewards of community dollars.


Honor Stakeholder Engagement

- Create a thoughtful, intentional plan based on input from community members, students, teachers and staff.



LA CANADA ELEMENTRY SCHOOL

site plan

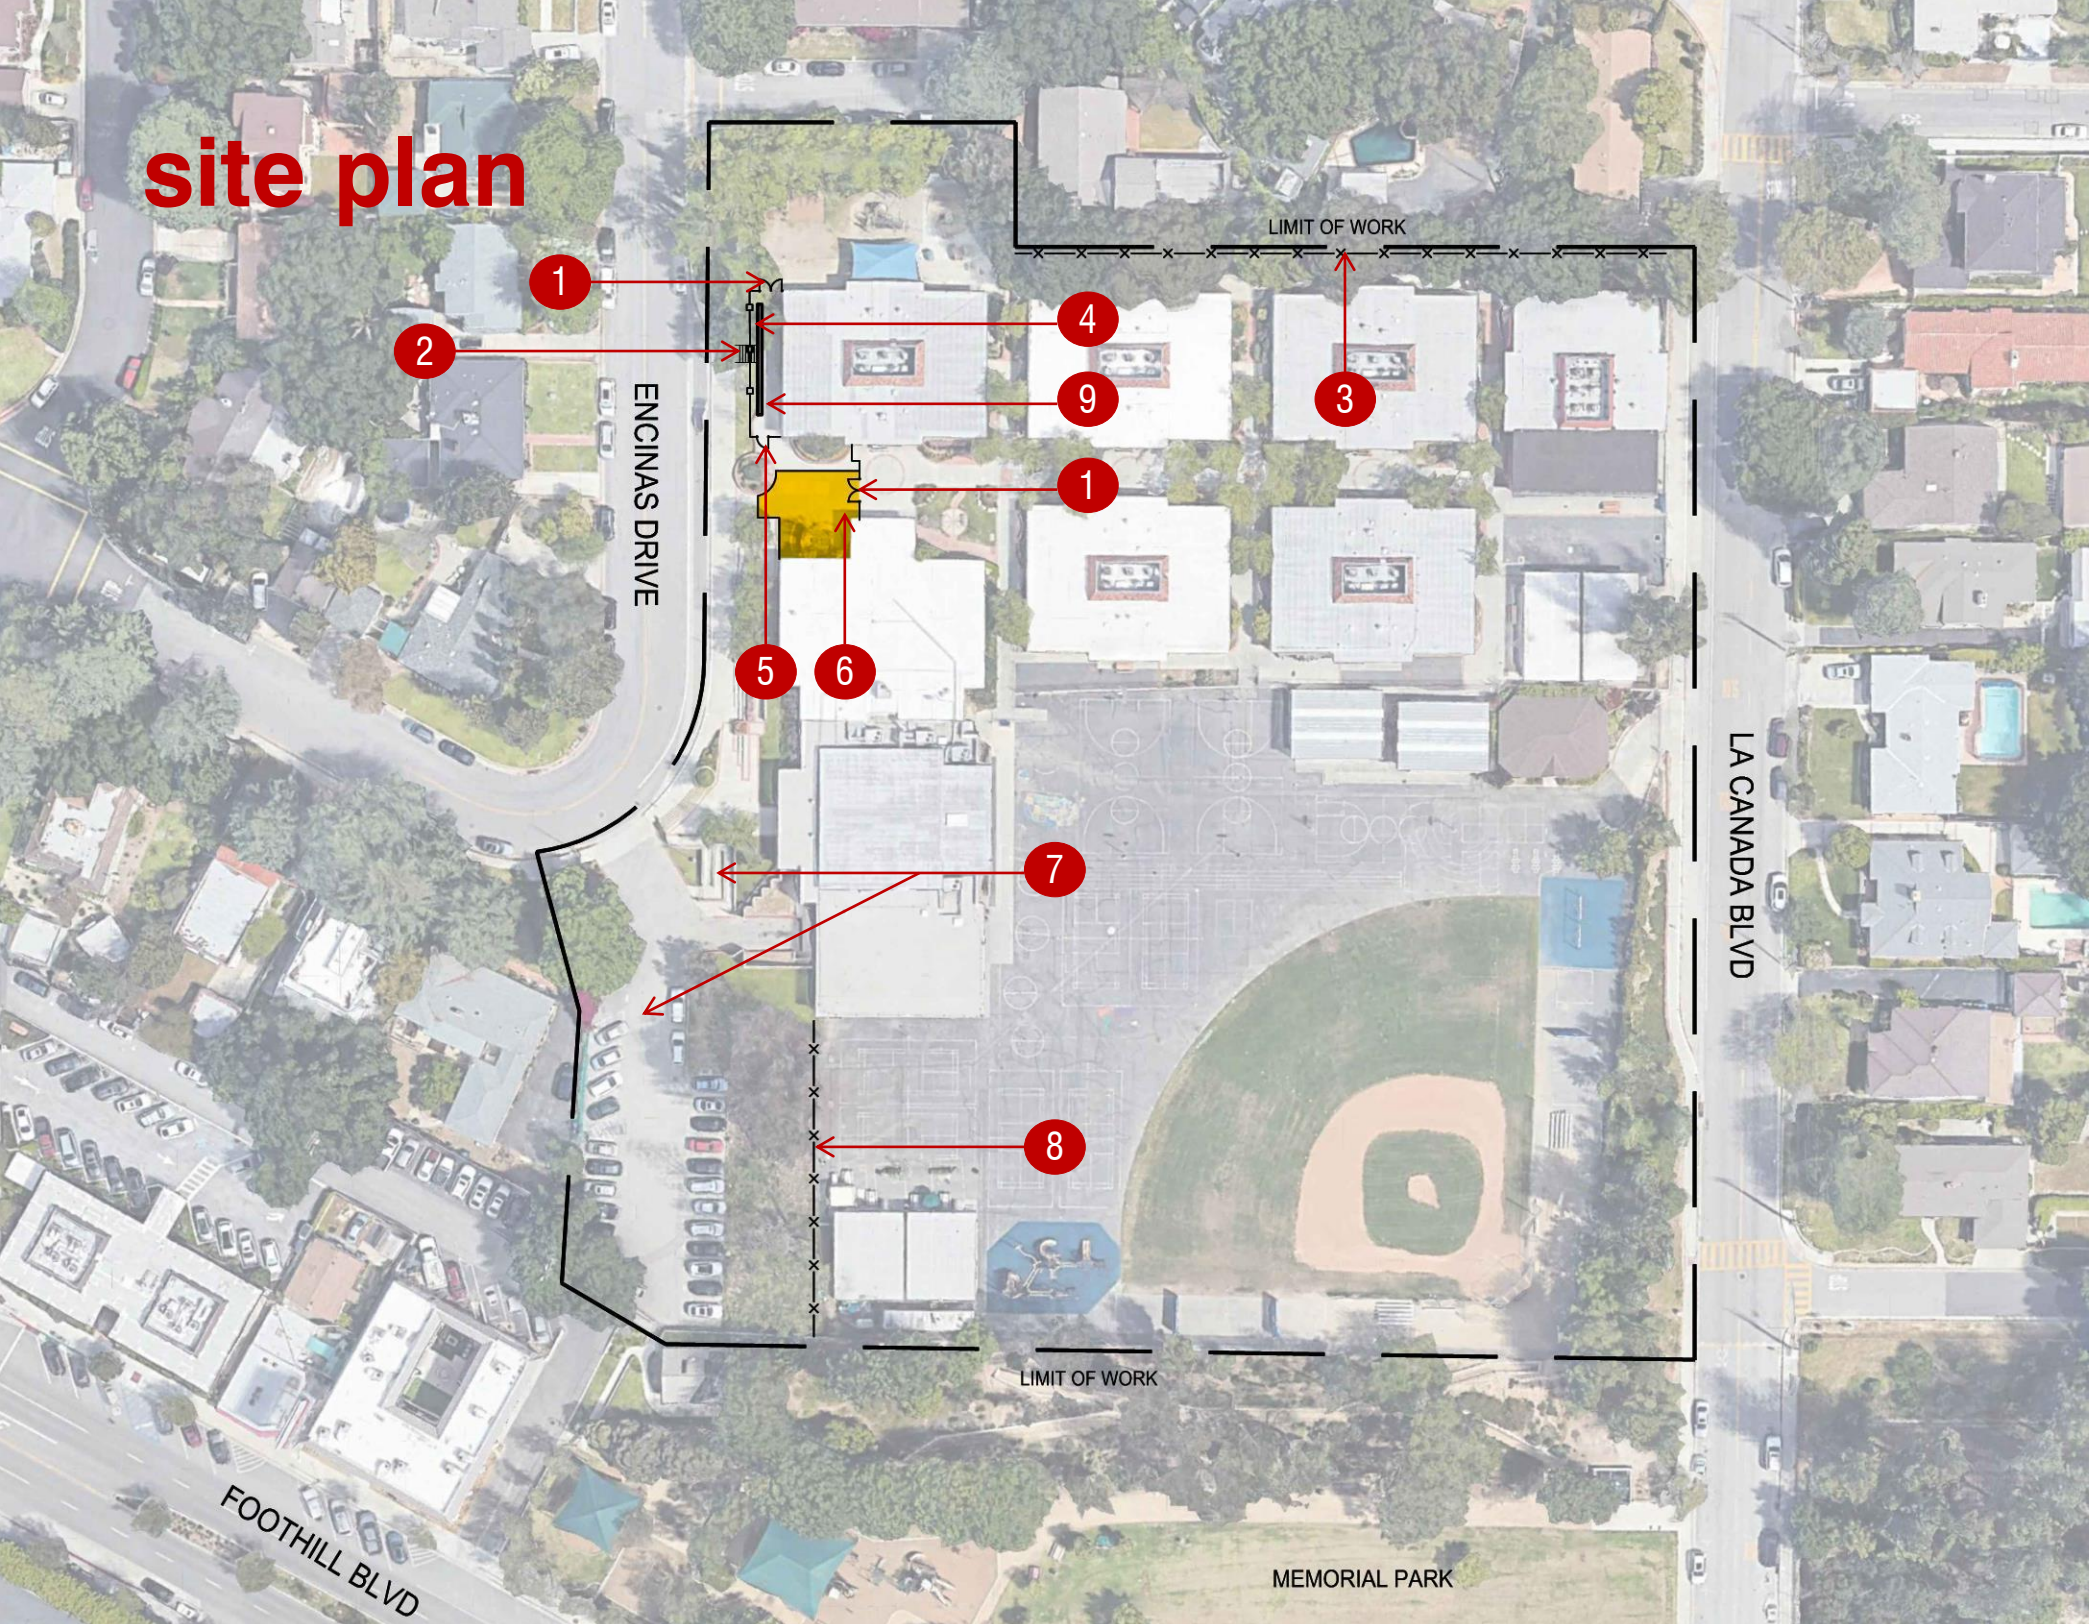

Legend:


- 1 8' Wd. Dbl. Tube Steel Gate
- 2 Remove Existing Stairs
- 3 Replace Chain Link Fence
- 4 6' Ht. Tube Steel Fence
- 5 4' Wd. Tube Steel Gate
- 6 Replace Concrete As Required For ADA Path Of Travel
- 7 Existing Ramp/Parking To Remain. Modifications May Be Required To Parking And Ramp System To Provide ADA Path Of Travel.
- 8 Replace Chain Link Mesh (Sand/Prime/Paint Posts)
- 9 Seat Wall



site improvements



Replace Chain Link Mesh

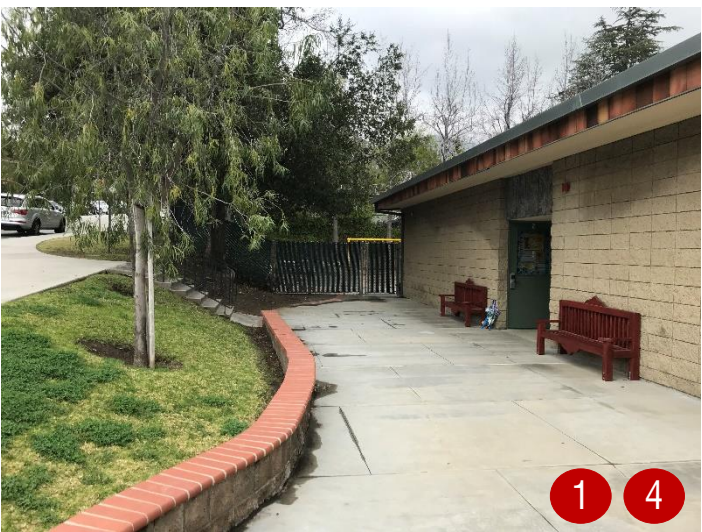

Remove Wall, Adjust Grades, Install Tube Steel Fence & Gate



Install Tube Steel Access Gate & Fencing.



Install Tube Steel Access Gate & Fencing.


PALM CREST ELEMENTARY SCHOOL

site plan




Legend:

- 1 6' Ht. Tube Steel Fence W/ 4' Wd. Gate
- 2 Concrete Work For Accessible Landing And Accessible Path Of Travel (Ramps) Will Be Required.
- 3 10' Ht. Tube Steel Fence W/ 8' Wd. Double Gate; Custom Panels Required For Elevation Changes.
- 4 6' Ht. Chain Link Fence
- 5 Add Catch Basin
- 6 6' Ht. Tube Steel Fence W/ 8' Wide Double Gate.



site improvements

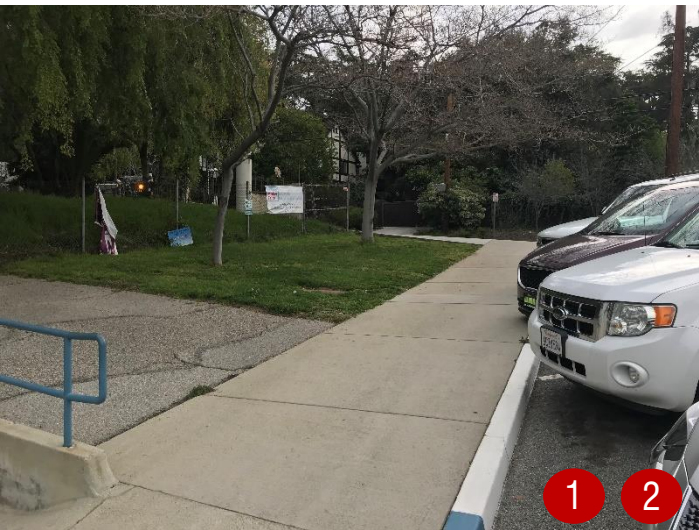

Install Tube Steel Access Gate And Fencing; Grading And Retaining Walls For Accessible Path Of Travel.



Install Tube Steel Access Gate And Fencing; Grading And Retaining Walls For Accessible Path Of Travel.



Install Tube Steel Access Gate And Fencing Property Line Wall To End Of Building.



Install Chain Link Fencing In Front Of Low Wall.



Install Tube Steel Access Gate And Fencing; Grading For Accessible Path Of Travel.




Install Tube Steel Access Gate And Fencing; Replace Portion Of Tube Railing.



Install Tube Steel Access Gate And Fencing; Grading For Accessible Path Of Travel.


PARADISE CANYON ELEMENTARY SCHOOL

site plan

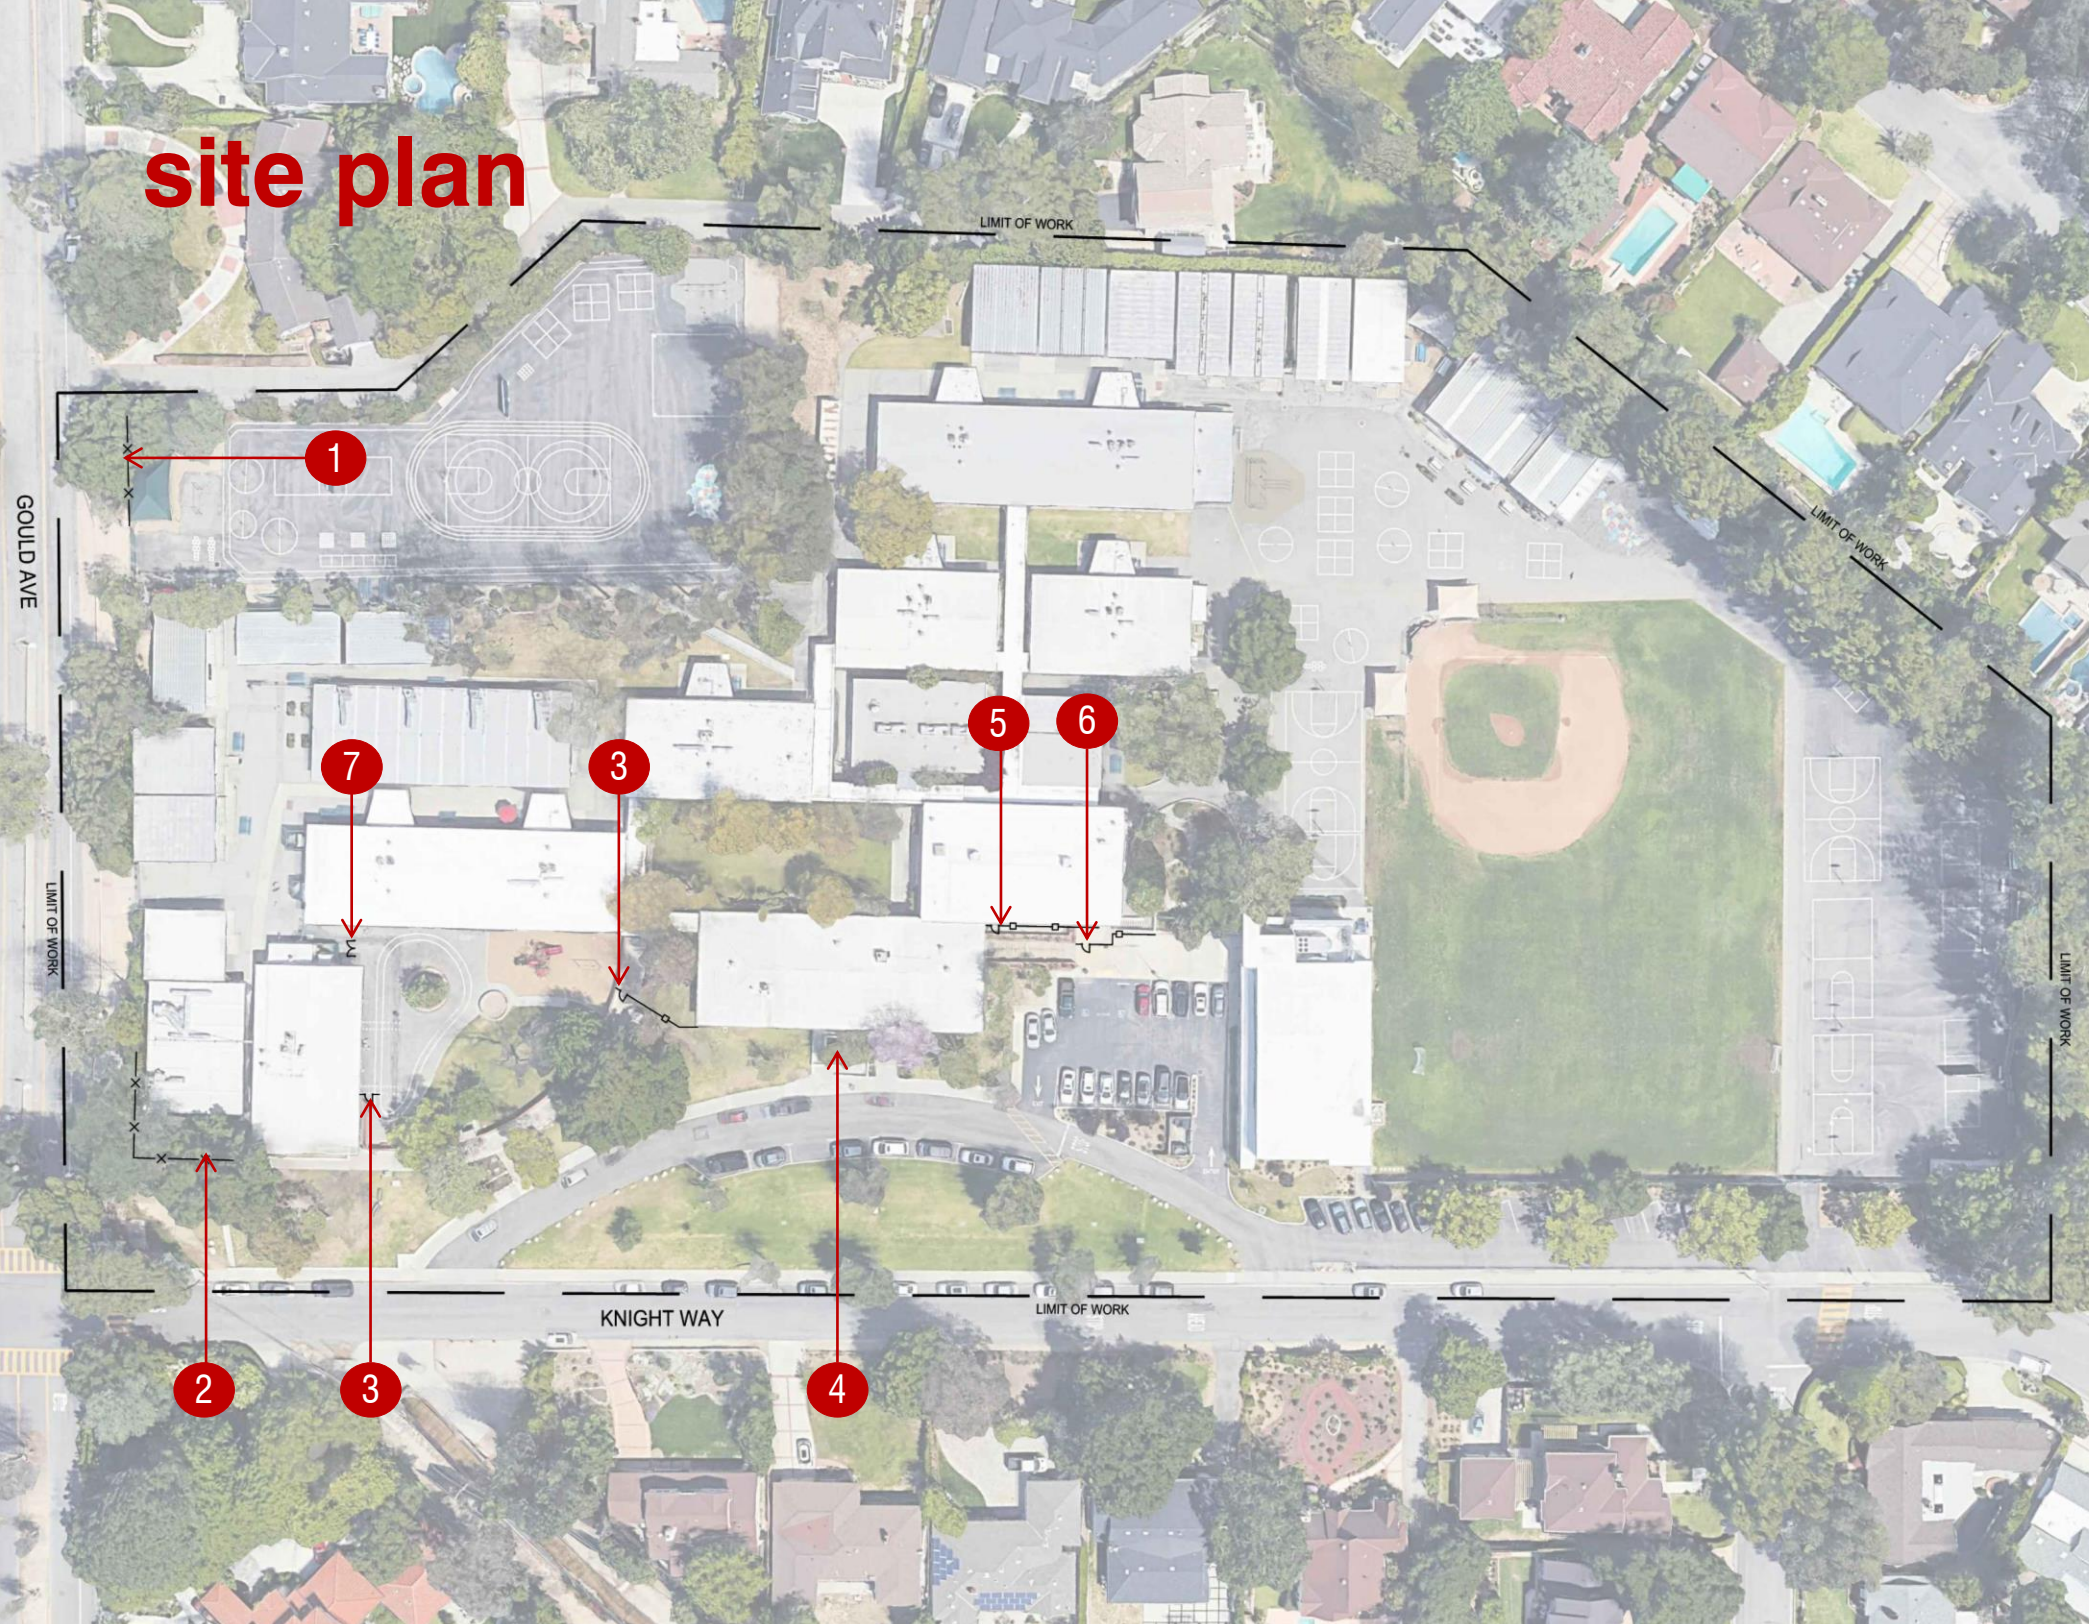

Legend:

- ① Chain Link Mesh Replacement (Sand/Prime/Paint Posts)
- ② 6' Ht. Chain Link Fence
- ③ 6' Ht. Tube Steel Fence W/ 4' Wd. Gate
- ④ Modify Ramp For Path Of Travel
- ⑤ 10' Ht. Tube Steel Fence W/ 4' Wd. Gate
- ⑥ 6' Ht. Tube Steel Fence W/ 4' Wd. Gate
- ⑦ 8' Wd. Double Chain Link Gate W/



site improvements



Install Tube Steel Egress Gate And Fencing From Retaining Wall To Exterior Stairway.



Install Tube Steel Access Gate And Fencing From Planter To Building.



Install Tube Steel Access Gate And Fencing From Building To Kindergarten Perimeter Wall.



Install Tube Steel Access Gate And Fence From End Of Kindergarten Wall To Face Of Building.



Install Tube Steel Access Gate And Fencing Along Planter To Building.



Ramp Modification For Ada Path Of Travel.




Install Taller Chain Link Fencing Along Perimeter.



Replace Chain Link Mesh.

tube steel gate/fencing options

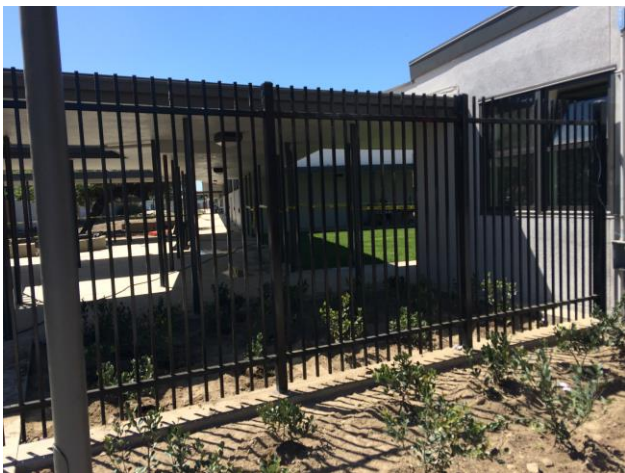


Tube Steel Fence- 2 Rail



Tube Steel Fence- 2 Rail



Tube Steel Gate- 2 Rail

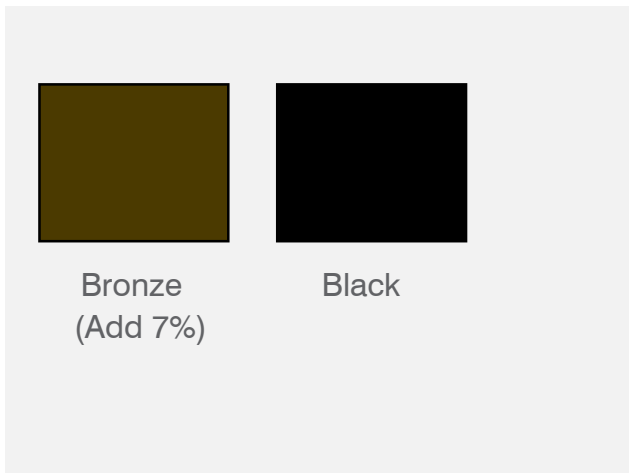

Color Options



Tube Steel Fence- 3 Rail



Tube Steel Fence- 3 Rail



Tube Steel Gate- 3 Rail

chain link fencing options



Chain Link Fence 2" Mesh



Chain Link Fence 1" Mesh

LPA



creating sustainable places and spaces that enrich the lives of those who use them